

# REDEZON 15192-P

## RUBBER WAXES

### Description

The product Redezon 15192-P is a mineral wax derived from petroleum that acts as a physical antiozonant in unsaturated rubber mixtures.

### Applications

Specially recommended for technical rubber products or tyre manufacturing.

Redezon 15192-P migrates to the rubber surface forming a thin layer protecting as an outstanding physical barrier against the ozone attack to the double bonds of the rubber structure.

The specially designed carbon distribution of the Redezon 15192-P makes it recommendable for tyre manufacturing giving full protection in mild climate conditions.

It is specially formulated in order to avoid caking so it can be used for long periods under appropriate storage conditions.


### Presentation

The product Redezon 15192-P is packaged in 25 kg. bags.

Do not store at temperatures above 40°C, avoid humidity and exposure to direct sunlight.

The product should be used within two years of being packaged.

### Carbon distribution

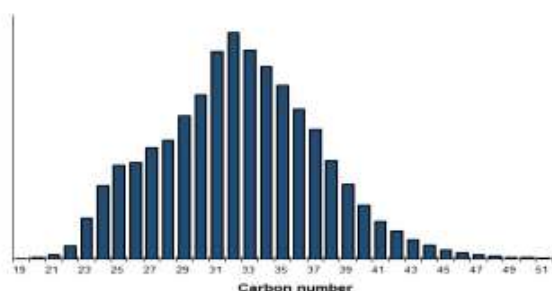

### Technical characteristics

	UNITY	METHOD	VALUE
Solidifying point	°C	ASTM D 938	65,0 – 72,0
Viscosity 100 °C	cSt	ASTM D 445	7,0 típico
Chromatography, n-paraffins	%p	IT-LAB-131	75,0 – 85,0
Chromatography, máximo carbon	-	IT-LAB-131	C31 - C33

Unless otherwise indicated, the values presented in the technical data should be considered as typical values.