

Agriculture

Polyethylene / EVA / EBA / Polypropylene



Empowering agriculture through innovation & sustainability

Innovative masterbatches and polymers: enabling sustainable agricultural practices and enhanced crop yield.

Repsol offers a **wide range of masterbatches, EVA/EBA copolymers, and metallocene linear low-density polyethylene** for producing films for agriculture. Our raw materials enable earlier, larger, more frequent, and better-quality crops, leading to more sustainable agricultural practices.

Our multifunction masterbatches are designed to meet the requirements of geographic areas with high ultraviolet radiation and critical growing conditions, offering tailored solutions **for greenhouses, tunnels, mulching, silage, silo bags, and stretch agricultural film.**

Committed to innovation and sustainability, Repsol's Chemicals Division continues to drive advancements in the agriculture sector, providing farmers with the tools they need to succeed in this challenging and ever-changing industry.

Let's grow together!





Repsol. A global multi-energy company

With over 8 decades of experience

It is leading the energy transition with its ambition of achieving zero net emissions by 2050.

Present throughout the energy value chain, the company employs 24,000 people worldwide and distributes its products in nearly 100 countries. Its customer-focused product and services portfolio meets all consumer needs of around 24 million customers, whether at home or on the move.

Repsol Campus, Corporate Headquarters in Madrid LEED® Platinum certificate, awarded by the prestigious U.S. Green Building Council (USGBC), for new buildings construction





Chemicals

Repsol manufactures a wide variety of products, ranging from base petrochemicals to derivatives

Base petrochemic and benzene.

Intermediate products: styrene, propylene oxide, polyether polyols, and propylene glycols.

Polyolefins: polypropylene (PP) and PP compounds, both high and low density polyethylene (HDPE and LDPE), metallocene linear low density polyethylene (mLLDPE), ethylene vinyl acetate (EVA) and ethylene butyl acrylate (EBA) copolymers.

Over 100 scientists and researchers working for you

Including qualified Stewardship.

Repsol's commitment to R&D is evidence of the company's aim to attain business excellence to meet future horizons.

Added value

Repsol's Chemicals Division, with a high degree of integration, focuses its strategy on the constant generation of value through differentiated products and services.

Base petrochemicals: ethylene, propylene, butadiene,

Including qualified personnel specialized on Product

Working for a more sustainable future

At Repsol, we believe in the circular economy, and we run specific projects that minimize the environmental impact of our materials. To this end, we are committed to making our industrial processes increasingly efficient and reducing the carbon footprint of our polymers.

We have a **specialized circular economy department** dedicated to recycling post-consumer materials to drive development of new materials offering solutions based on innovative polyolefins with recycled content.

We use recycled plastics in critical applications, creating new markets for plastic waste and driving circularity by giving that waste a new use. As a result, we offer a wide range of polyolefins with recycled content that deliver excellent engineering performance certified under Recyclass.

We have circular polyolefins obtained by incorporating pyrolysis oil, from chemically recycled plastic waste not suitable for mechanical recycling, together with virgin feedstock into our petrochemical process, reducing the consumption of non-renewable resources.

These circular polyolefins have the same properties and quality as virgin material and hold Food Contact Approval.



Commited to Net Zero Emissions

We have obtained ISCC PLUS certification for the traceability of the plastic waste used as raw material in our circular polyolefins.

Furthermore, we offer a full Repsol Reciclex® ISCC Plus Certified Polyolefin bio-based range, including first-generation Bio [1G] from sustainably sourced crops, following the ISCC EU 202 best environmental, social, and economic practices; and **second-generation** bio-based circular polyolefins [2G] from renewable waste.

Our ambition is to produce 10% of our polyolefins as biobased and circular products by 2030, a move that will promote the circular economy. This initiative, in conjunction with other initiatives in Repsol's circular economy strategy, will support the company's goal of achieving net zero emissions by 2050.

To contribute to the company's emissions neutrality goal, **our** chemicals business has launched its 3030 Plan, intended to cut our carbon intensity by 30% by 2030.

Advancing the circular economy and lowering carbon intensity in our chemicals business will contribute towards transforming Repsol's industrial operations, as well as **developing high-value-added raw** materials, making it possible to manufacture an infinite number of products that improve human well-being, safety, and quality of life while enhancing the environment.



12 grades for agriculture Agriculture

High technology for the field

Repsol is committed to caring for the environment and continues its research into high technology to make agriculture under plastic increasingly sustainable. And all this with strict management of the quality and safety in its manufacturing process, distribution, transportation and storage of final products.

More than 40 years working alongside farmers producing and marketing materials for greenhouse covers

Our Repsol Technology Lab is the hub of our innovation and development. This is where our products come to life and are meticulously perfected in our quest for innovative solutions to meet our customers' needs. Our mission is to develop cutting-edge products and offer high-quality solutions to improve your business.



A long-standing experience in providing a wide range of solutions to farmers to ensure more productive crops

UV/AO masterbatch

Repsol Alcudia®

Grade	Additives	Recommended dosage	Maximum radiation	Thickness	TGLV	Haze
			KLy/year	hw	%	%
IMB UV2120/5	Hals, UV absorbers, AO	5 % for 2 agricultural seasons	160	180	90	22
IMB UV2130/6	Hals	6 % for 2 agricultural seasons	160	180	90	40
117/TD	Nickel quencher (green), UV absorbers, AO	7 % for 2 agricultural seasons 10 % for 2 years	160	180	90	22
IMB UV2000	Hals	6 % for 3 agricultural seasons 6.5 % for 4 agricultural seasons* 2000 ppm sulphur	160 100	200 200	92 92	8 8
IMB UVH3A	Hals, UV absorbers, AO	5.5 % for 3 years 2000 ppm sulphur 6.5 % for 3 years 3000 ppm sulphur	160 160	200 200	92 92	17 17
IMB UV3020	Hals, UV absorbers, AD	6.5 % for 3 years 3000 ppm sulphur 7.5 % for 3 years 5000 ppm sulphur	160 160	200 200	92 92	17 17

* Different maximum radiation



The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Applications

Greenhouses and tunnels.

AO: Antioxidants

UV masterbatch for agricultural and industrial applications

Repsol Alcudia®

Grade	ade Additives Recommended		Applications		
IMB UVSTRETCH	Hals	2-4 % agricultural stretch film 1-3 % mulch 1-2 % industrial film	Cover hay bales, mulching, industrial film, silage.		
IMB FI1A	Hals	0.7-2 % shrink film 2-5 % stabilization silo bags	Shrink film, silo bags.		



The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Thermal masterbatch

Repsol Alcudia®

Grade	Property	Additives	Recommended dosage	Applicat
IMB TERMIC	Thermicity	Mineral fillers	4 % for thermicity 80 % in EVA > 5 % AV	Greenhouses, tunne
IMB CARGA	Thermicity	Mineral fillers	3 % for thermicity 80 % in EVA > 5 % AV	Greenhouses, tunne
IMB TERMICLARO	Thermicity	Mineral fillers	8 % for thermicity 80 % in EBA > 3 % AB	Greenhouses, tunne
IMB TER60	Thermicity	Mineral fillers	6 % for thermicity 80% in EBA > 3 % AB	Greenhouses, tunne



The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



cations

nnels and mulching.

nnels and mulching.

nnels and mulching.

nnels and mulching.

Greenhouses

Repsol formulation proposal

It is recommended the use of Repsol Resistex[®] 1810F/FG mixed with the LDPE and Repsol Ebantix[®] EBA grades to improve mechanical properties and temperature resistance in areas of contact with the greenhouse structure.



THERMAL

A: 1810F/FG or E303 + UV MB* B: E803 or E1303 + UV MB* + Thermal MB** **C**: 1810F/FG or E303 + UV MB*

NO THERMAL

A: 1810F/FG + 2303F/2203F + UV MB* **B**: 2303F/2203F + UV MB* C: 1810F/FG + 2303F/2203F + UV MB*

* Select the type of UV MB and dosage based on duration, UV radiation, thickness and exposure to contaminants such as sulphur, chlorine, etc. ** For diffuse thermal films, dose IMB CARGA or IMB TERMIC; for clear thermal

films dose IMB TERMICLARO



The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Double chamber

Repsol formulation proposal

The double chamber is a passive heating technique. It consists of a plastic sheet that divides the greenhouse into two chambers - lower and upper - with the aim of increasing the accumulated heat during the day in the lower one and slowing down the loss of this heat during the night. (*)

- Increase in minimum night temperature.
- Reduction of temperature and relative humidity oscillations, combined with adequate ventilation management during the day.
- Elimination of drip on the crop.




The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA's current knowledge and experience and species to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Tunnel Repsol formulation proposal

A: E303 + 2-4 % MB Hals*
B: E1303 + 2-4 % MB Hals*
C: E303 + 2-4 % MB Hals*

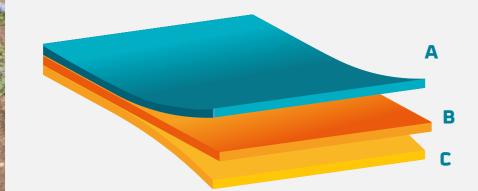

Ex: Film 100 microns, 160 KLy, 2 winters:
4% IMB UV2130/6 for high diffusion
3.5% IMB UV2120/5 for medium diffusion
2.5% IMB UV2000, for high transparency




The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.




Stretch agricultural film

Repsol formulation proposal

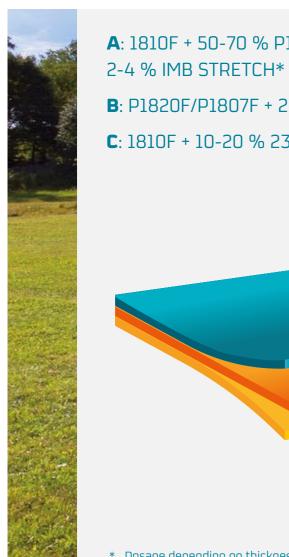

A: 1810F + 50-70 % P1820F/P1807F + 20 % PIB + **B**: P1820F/P1807F + 2-4 % IMB UVSTRETCH* **C**: 1810F + 10-20 % 2308F + 2-4 % IMB UVSTRETCH*

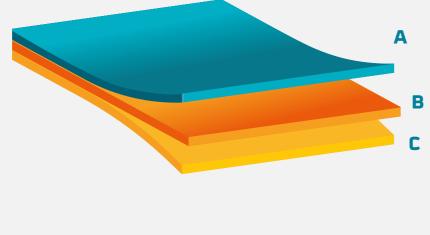

* Dosage depending on thickness




The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Mulching Repsol formulation proposal

It is recommended the use of Repsol Ebantix[®] EBA copolymers to increase film thermicity and the use of Repsol Resistex[®] mLLDPE grades to meet mechanical property requirements.

The IMB UVSTRETCH is recommended for UV protection.

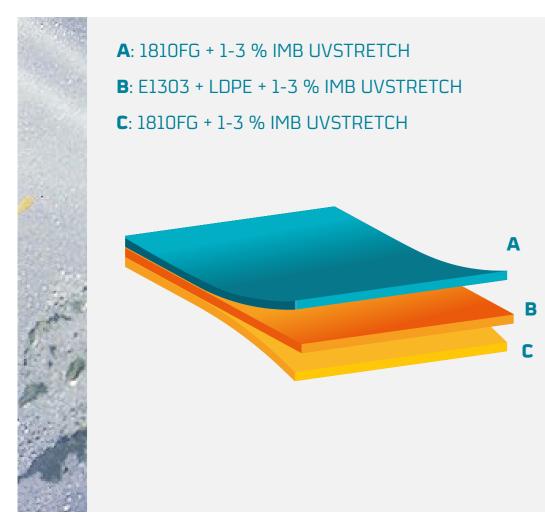



The information contained herein is based on REPSOL QUIMICA's current knowledge and experience and is presented in good faith for guidance only. Although REPSOL QUIMICA declares to have been most diligent when including the information contained herein, taking into account that several and different factors may affect the processing, application or use of the products, the convertor shall be responsible in every case for the conditions under which the products are transformed as well as for the final use given to them. REPSOL QUIMICA warns that this information may undergo variations or improvements; therefore REPSOL QUIMICA is not obliged to reflect these in this document or to communicate them to whomever may have access to it. Moreover, these readers should be aware that some or all of the products might be protected by intellectual property rights. © REPSOL QUIMICA, S.A. 2024. All rights reserved.



Safety and quality are our priority

Excellence is intrinsic to Repsol's values. It infuses our daily work and helps guide our decisions and actions, contributing to achieve the commitment made to our customers, stakeholders, employees, suppliers / partners, and society to build a better future.

Petrochemical complexes and logistics centers all have ISO 45001. **We are food safety leaders**. All our facilities are FSSC 22000 certified in recognition of our food safety risk management processes throughout the supply chain.

Technical Data Sheets and MSDS are available on: www.repsol.com


All petrochemical plants are compliant with the current ISO 9001 standards, for the quality of processes from manufacture to distribution, transport management and end product warehousing.

In February 2019 we obtained the ISCC PLUS certification in all our polyolefin production centers. **We are one of the leading companies in the production of circular polyolefins that use recycled plastic waste as raw material**, and this certification is an example of our commitment to promote the Circular Economy of our materials.

Certifications

Petrochemical	All industrial	Puertollano,	Puertollano	Puertollano,
plants, plants	complex	Tarragona	and Monzón	Tarragona
and logistics	FSSC 22000	and Monzón plants	plants	and Sines
ISO 45001	All petrochemical plants ISO 9001 ISCC Plus	IATF 16949	Recyclass	ISO 50001 ISO 14001 ISO 14064



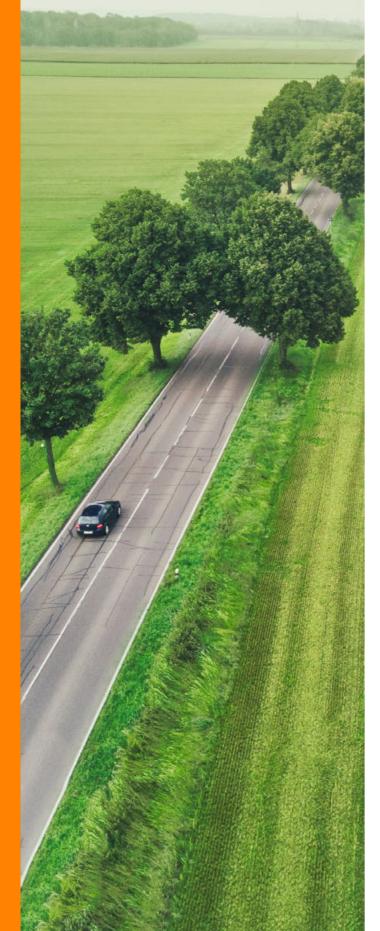

Environment

Repsol's purpose is to become a net-zero emissions company by 2050, and our 2021-2025 Strategic Plan enables us to continue successfully advancing our multi-energy commitment.

We have set up and deployed an ambitious CO₂ program reduction that pursues a 40% reduction in SCOPE 1 & 2 emissions by 2030 (2017 as reference year) and zero emissions before 2050. Energy efficiency programs to reduce energy consumption and GHG emissions are one of the key elements of our strategy in the short term, followed by deep process electrification and CCUS. Biofeedstocks and renewable electricity will have a relevant role in this transition.

These programs pursue long-term targets made public to facilitate their progress by the stakeholders. In this sense, Repsol Química is committed to a reduction of 0.26 million tons per year of GHG emissions in the 2021-2025 Strategic Plan and a 1.3 million tons per year reduction until 2030 with a roadmap to be a net-zero company before 2050.

Regarding SCOPE 3 emissions, Repsol Química will contribute to the CO₂ emissions reduction at the plastics' end of life with our circularity projects, while we offer sustainable solutions for our clients 100% recyclable polyolefins.

All petrochemical complexes have ISO 14001 certification for their environmental management and the reduction of the impact of their facilities, and ISO 14064 for the annual verification of greenhouse gas (GHG) emissions. In addition, the chemical area of our complexes in Tarragona (2015), Puertollano (2013), and Sines (2016) has implemented an Energy Management System according to the requirements indicated in the International Standard ISO 50001. This system is dedicated to developing and implementing our organization's energy policy and managing the energy aspects of our activities, products, or services. The objective is to increase and improve our energy efficiency based on systems implementation aimed at continuous energy performance improvement, thus contributing to more efficient and sustainable energy use.

Repsol Química has released on a yearly frequency the carbon footprint of all its product families since 2020, considering the "cradle to gate" scope based on ISO 14067.

Efficiency Foresight Respect Value-oriented

October 2024



Chemicals Customer Care

Spain

Tel.: 900 10 32 39 Tel.: +34 91 753 18 01

Portugal

Tel.: 800 60 501 111 Tel.: +34 91 753 18 05

France

Tel.: 800 60 503 333 Tel.: +34 91 753 18 02

Italy

Tel.: 800 60 509 999 Tel.: +34 91 753 18 04

Germany

Tel.: 800 60 504 444 Tel.: +34 91 753 18 00

United Kingdom

Tel.: 800 60 502 222 Tel.: +34 91 753 18 03

sacrq@repsol.com repsol.com



Corporate Headquarters

Méndez Álvaro, 44 28045 Madrid. Spain Tel.: +34 91 753 81 00 **repsol.com**

Technical Service & Development Repsol Technology Lab

Agustín Betancourt, s/n 28935 Móstoles, Madrid. Spain Tel.: +34 91 753 86 00

atd_poliolefinas@repsol.com